
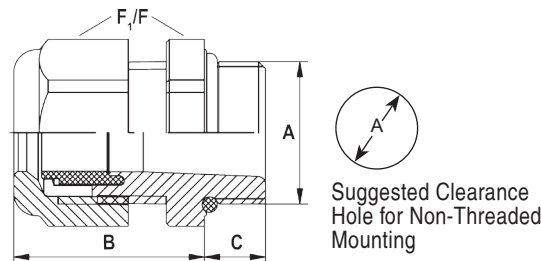


For Non-Armored Cable

Fiber Reinforced Nylon, Cable Glands for Hazardous Duty Locations, Black, V0, UL94, NEMA 6, IP 68, 150 PSIG, 10 BAR, DIN EN 60079-0: 2012

Part Numbers	Cable Range	Thread Type & Size	Dimensions in Inches (mm)			
			A	B	C	F ₁ /F
-4°F to 185°F (-20°C to 85°C)			Clearance Hole + .01" (+.25 mm)	Body Length (Dome)	Thread Length (Standard)	Wrench Flats
 (Standard)	Inches (mm)	Page 59 for Thread Specs				
CD09NA-BXA	.16 - .31 (4 - 8)	3/8" NPT	.68 (17.2)	.87 (22)	.59 (15)	.74 (19) / .87 (22)
CD09NR-BXA	.08 - .24 (2 - 6)					
CD13NA-BXA	.24 - .47 (6 - 12)	1/2" NPT	.83 (21.1)	1.06 (27)	.51 (13)	.95 (24)
CD13NR-BXA	.20 - .35 (5 - 9)					
CD16NA-BXA	.39 - .55 (10 - 14)	1/2" NPT	.83 (21.1)	1.10 (28)	.51 (13)	1.06 (27)
CD16NR-BXA	.28 - .47 (7 - 12)					
CD21NA-BXA	.51 - .71 (13 - 18)	3/4" NPT	1.05 (26.7)	1.22 (31)	.55 (14)	1.29 (33)
CD21NR-BXA	.35 - .63 (9 - 16)					
CD29NA-BXA	.71 - .98 (18 - 25)	1" NPT	1.35 (34.3)	1.53 (39)	.75 (19)	1.65 (42)
CD29NR-BXA	.51 - .79 (13 - 20)					
CD29LA-BXA	.71 - .98 (18 - 25)	1-1/4" NPT	1.65 (41.9)	1.53 (39)	.63 (16)	1.62 (42)/1.81 (46)
CD29LR-BXA	.51 - .79 (13 - 20)					
CD36NA-BXA	.87 - 1.26 (22 - 32)	1-1/2" NPT	1.92 (48.7)	1.89 (48)	.79 (20)	2.09 (53)
CD36NR-BXA	.79 - 1.02 (20 - 26)					

*Note: UL f1 (746C) rating applies to Black Nylon Fittings only.

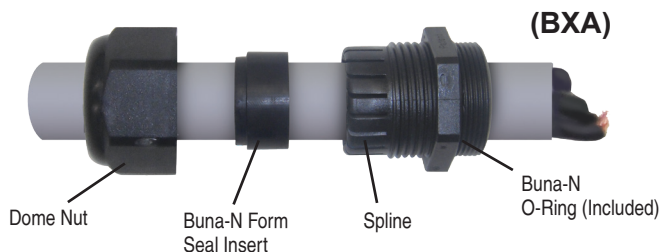

This product has been specially developed for the ignition protection category Ex-e, passing all of the new norms and withstanding a high degree of shock resistance with its fiber reinforced body.

- Halogen-Free
- Flame rating V0 according to UL 94
- Protection IP 68 – 10 bar according to DIN EN 60529
- 7 Joule Impact Resistant
- Anti - vibration dome nut
- Wide clamping range
- Applicable up to +85°C (185°F)
- Abrasion resistant labeling
- O-Ring standard
- Applicable in Class, Div & Zone areas
- No additional mechanical protection of the gland necessary



When ordering the Blue version of this product please substitute the BX for BXII! (e.g.- CD20MR-UX)